



SPECIFICATIONS -- Air-Row DA-248 for Grid Ceilings

Volts	Hz	Full Load Amps	Running Watts	RPM	Wt. (lbs)	ACFM
120	60	.25	31	1,550	12.6	740
120	60	.17	20	1,300	12.6	621
120	60	.07	8	900	12.6	430

Description

The Air-Row LA-248 is a destratification fan designed to drop into a 2' x 2' grid of a suspended ceiling. This fan delivers a column of air no wider than 2-3' from the ceiling to the floor and spread across the floor.

ECM Motor


- 3-speed
- Efficiency 65-70%
- IP 55
- "Soft Start" feature
- Thermal protection
 - One shot thermal fuse
 - Built-in electronic overload protection

Housing

- 0.40 aluminum
- Polar white

Warranty

- Full warranty for three years
- ETL Certified USA and Canada

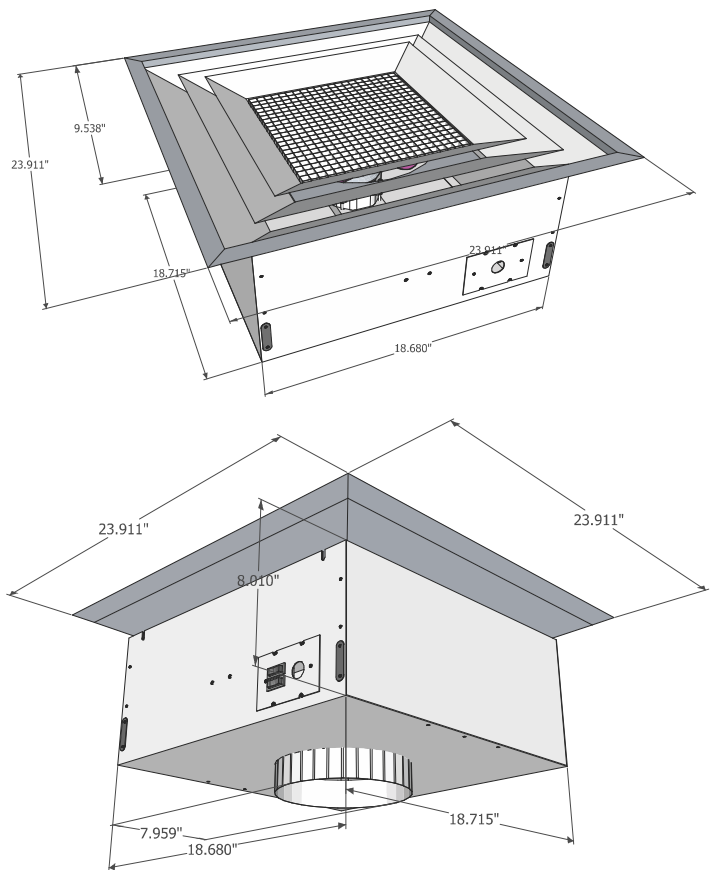

421 Industrial Drive
Carmel, IN 46032
www.airrowfans.com

Office: 317-691-7255
Sales: 317-691-7255
Tech Support: 317-574-1009

